

LCA Series

ASME Standard Liquid GAC Vessel



Features & Specifications

- Carbon steel ASME Section VIII designed vessels (stamp optional)
- All Welded Steel construction, ASTM SA-516 Gr. 70 sheet steel shell
- ASTM SA-516 Gr. 70 steel standard flanged & dished heads
- Tnemec series 20 pota-pox Polyamide epoxy lining certified per NSF std. 61 for potable water service
- Epoxy/urethane external finish for corrosion and UV resistance
- Fork tubes for easy lifting
- 3/4" Drain valve
- Sample/pressure taps above & below the bed
- (2) 12" x 16" elliptical access manways
- Inverted bottom head (on LC-020 & smaller) for less than 8' overall height to allow easy transport
- (2) 12" x 16" elliptical manways with full faced neoprene gasket and zinc plated hardware
- PVC hub and slotted lateral underdrain for distribution at high and low flow rates



Applications

- Remediation industry
- Industrial waste water
- Removal of dissolved gasoline range organics (BTEX compounds), & other hydrocarbons from water (including MTBE)
- Removal of dissolved chlorinated organic compounds from water
- Removal of dissolved pesticides and other semi-volatile organic compounds from water
- Liquid phase granular activated carbon, virgin or reactivated
- Drinking water for dissolved organics
- Impregnated granular activated carbon
- Excavation dewatering
- Impregnated activated clays/zeolite


H2K Technologies, Inc.
7550 Commerce St
Corcoran, MN 55340
Phone: 763.746.9900
Fax: 763.746.9903
www.H2KTECH.com
Sales@H2KTech.com

Model Number	Inlet/Outlet Connection	Height In.	Diam. In.	Rated Flow GPM	Carbon Capacity Lbs.	Empty Weight Lbs.	Loaded Weight Lbs.	Operating Weight Lbs.	Spent & Drained Weight Lbs.	Pressure Rating, PSI
LC-007	2" 150 lb flng	84	36	57	1,000	880	1,880	3,680	2,280	150 psi
LC-013	2" 150 lb flng	84	48	101	1,500	1,280	2,780	6,280	3,380	150 psi
LC-020	3" 150 lb flng	86	60	157	2,500	1,650	4,150	9,650	5,150	150 psi
LC-028	4" 150 lb flng	126	72	226	5,000	4,000	9,000	24,000	14,000	150 psi
LC-050	6" 150 lb flng	148	96	400	10,000	8,100	18,100	36,500	28,100	150 psi
LC-078	6" 150 lb flng	190	120	628	20,000	10,900	30,000	67,900	50,900	150 psi
LC-113	8" 150 lb flng	216	144	900	30,000	16,700	44,700	101,200	72,500	150 psi

Pressure Drop for ASME Std. Liquid GAC Vessels

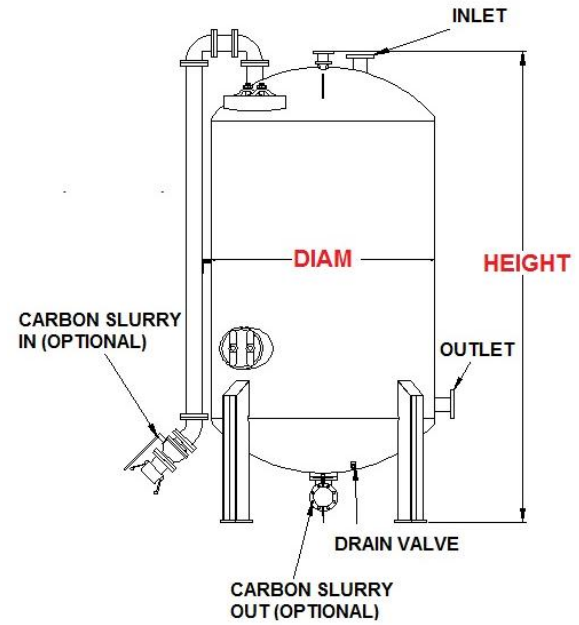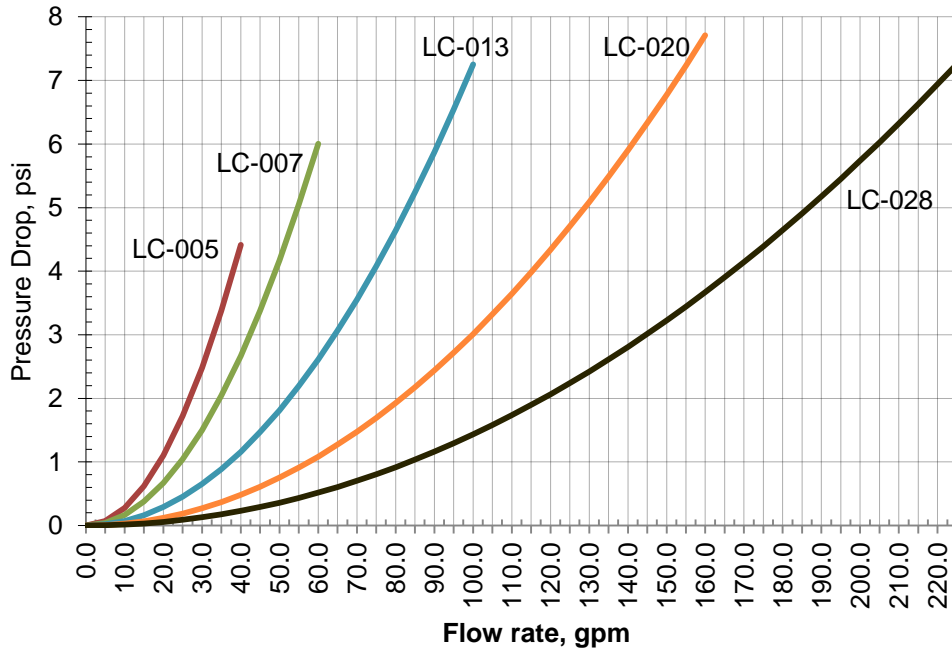

Pressure Drop for ASME Std. Liquid GAC Vessels

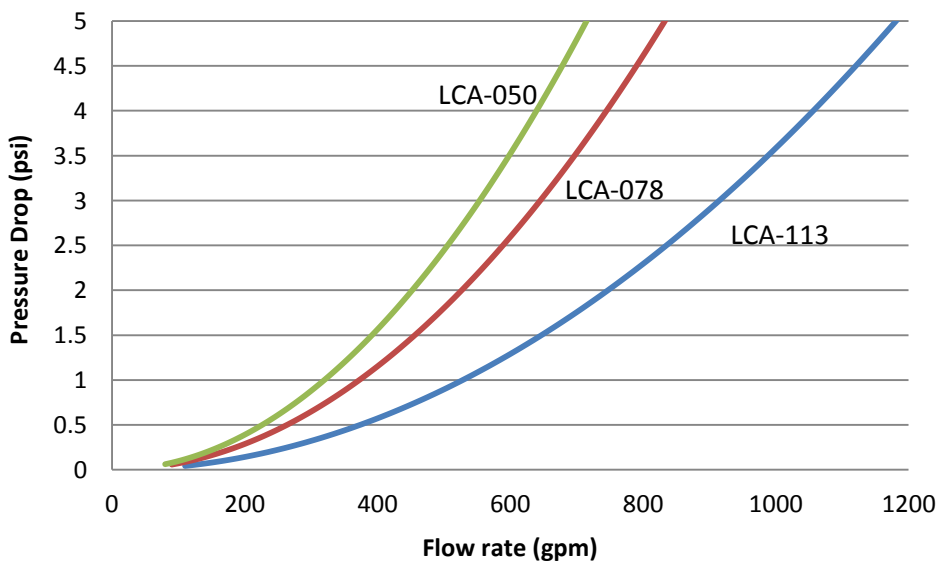

Options

- ASME designed & stamped
- Stainless steel internals, 316 or 304 ss
- Piping header for series lead/lag, parallel or standby operation of (2), (3), or more vessels
- Skid assemblies for single or multiple vessels
- Bed sampling ports
- Heat trace or immersion heaters for classified or non-classified electrical areas for freeze protection
- R-5 insulation with jacket, (steel or aluminum jacket)
- Vinyl ester interior lining for corrosive or high abrasion service
- Pressure relief assemblies, PRV or rupture disk
- Interior lining Holiday spark testing
- Flow, pressure, level & temperature gages or transmitters
- Flanged or NPT inlet and outlet connections or additional manways

Additional Photos

